Ⓐ 36 – 20 Tucks Road, Seven Hill NSW, 2147
Ⓟh 02 9037 8200 Ⓔ info@nswdistributors.com.au
Ⓦ www.nswdistributors.com.au

CLD downlight
90mm



IP44



SPECIFICATIONS

Material Specifications


Material Specifications	PC Housing / Aluminium Diecast LED Module
Colour	Matt White / Matt Black
Cutout	90mm
Dimensions	98mm (Face Dia) x 123mm (H)
Ingress Protection	IP44
Warranty	5 Year Replacement

Electrical Specifications

LED Wattage	15W
Power Supply	Tridonic TRIAC
Options	Tridonic DALI
Operating Temperature (Ta)	-20°C to +40°C
Connection Method	Australian Flex & Plug

Optic Specifications

Light Source	Citizen COB
CRI	90+
Delivered Lumens	1200Lm
Beam Angle	60° (Available in 28° & 38° Options)
Correlated Colour Temperature	2700K / 3000K / 4000K / 5000K
Material Specifications	<2
Rated Lifetime (L80B10)	>90,000Hr

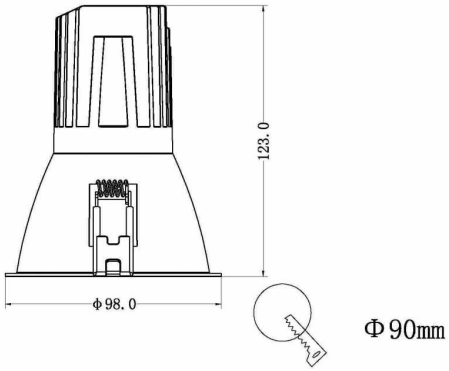

VARIATIONS

CLD3790-27K-W	15W, Matt White, 60°, TRIAC, 2700K
CLD3790-3K-W	15W, Matt White, 60°, TRIAC, 3000K
CLD3790-4K-W	15W, Matt White, 60°, TRIAC, 4000K
CLD3790-5K-W	15W, Matt White, 60°, TRIAC, 5000K
CLD3790-27K-B	15W, Matt Black, 60°, TRIAC, 2700K
CLD3790-3K-B	15W, Matt Black, 60°, TRIAC, 3000K
CLD3790-4K-B	15W, Matt Black, 60°, TRIAC, 4000K
CLD3790-4K-B	15W, Matt Black, 60°, TRIAC, 5000K

© NSW Distributors 2026

View product on website