Ⓐ 36 – 20 Tucks Road, Seven Hill NSW, 2147
Ⓟh 02 9037 8200 Ⓔ info@nswdistributors.com.au
Ⓦ www.nswdistributors.com.au

CLDS - DOWNLIGHT
75mm



IP44



SPECIFICATIONS

Material Specifications


Material	PC Housing / Aluminium Die-cast LED Module
Colour	Matt White / Matt Black
Cutout	75mm
Dimensions	82mm (Face Dia) x 103mm (H)
Ingress Protection	IP44
Warranty	5 Year Replacement

Electrical Specifications

LED Wattage	15W
Power Supply	Tridonic TRIAC
Options	Tridonic DALI
Operating Temperature (Ta)	-20°C to +40°C
Connection Method	Australian Flex & Plug

Optic Specifications

Light Source	Citizen COB
CRI	90+
Delivered Lumens	1200Lm
Beam Angle	55° (Available in 28° & 38° Options)
Correlated Colour Temperature	2700K / 3000K / 4000K / 5000K
Colour Deviation	<2
Rated Lifetime (L80B10)	>90,000hr

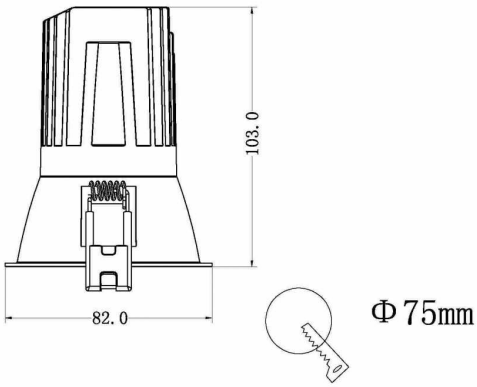

VARIATIONS

CLDS3775-27K-W	15W, Matt White, 55°, TRIAC, 2700K
CLDS3775-3K-W	15W, Matt White, 55°, TRIAC, 3000K
CLDS3775-4K-W	15W, Matt White, 55°, TRIAC, 4000K
CLDS3775-5K-W	15W, Matt White, 55°, TRIAC, 5000K
CLDS3775-27-B	15W, Matt Black, 55°, TRIAC, 2700K
CLDS3775-30-B	15W, Matt Black, 55°, TRIAC, 3000K
CLDS3775-40-B	15W, Matt Black, 55°, TRIAC, 4000K
CLDS3775-50-B	15W, Matt Black, 55°, TRIAC, 5000K

© NSW Distributors 2026

View product on website