

# DL03-6 IP65 Downlight

## 160mm



### SPECIFICATIONS

#### Material Specifications



<b>Material Specifications</b>	Aluminium Diecast Housing / Clear Diffuser (Satin & Opal Lens Options Available)
<b>Colour</b>	White Trim (Custom Colour Options Available)
<b>Cutout</b>	160mm
<b>Dimensions</b>	183mm (Face Dia) x 80mm (H)
<b>Ingress Protection</b>	IP65
<b>Warranty</b>	5 Year Replacement

#### Electrical Specifications

<b>LED Wattage</b>	40W Max.
<b>Power Supply</b>	Tridonic Fixed Output (NFC Programmable)
<b>Options</b>	Tridonic DALI
<b>Operating Temperature (Ta)</b>	-20°C to +45°C
<b>Connection Method</b>	Australian Flex & Plug

#### Optic Specifications

<b>Light Source</b>	Philips COB
<b>CRI</b>	90+
<b>Delivered Lumens</b>	680Lm - 3400Lm
<b>Beam Angle</b>	60°
<b>Correlated Colour Temperature</b>	2700K / 3000K / 3500K / 4000K / 5000K
<b>Rated Lifetime (L80B10)</b>	>50,000hr

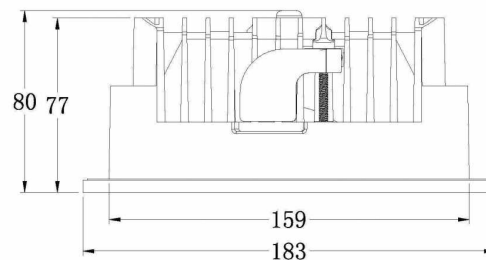

### VARIATIONS

<b>DL03-6-27K</b>	8W - 40W Multi-Watt, 2700K
<b>DL03-6-3K</b>	8W - 40W Multi-Watt, 3000K
<b>DL03-6-35K</b>	8W - 40W Multi-Watt, 3500K
<b>DL03-6-4K</b>	8W - 40W Multi-Watt, 4000K
<b>DL03-6-5K</b>	8W - 40W Multi-Watt, 5000K