Ⓐ 36 – 20 Tucks Road, Seven Hill NSW, 2147
Ⓟh 02 9037 8200 Ⓔ info@nswdistributors.com.au
Ⓦ www.nswdistributors.com.au

DL03-3 IP65 Downlight
90mm



IP65



SPECIFICATIONS

Material Specifications

Material Specifications	Aluminium Diecast Housing / Clear Diffuser (Satin & Opal Lens Options Available)
Colour	White Trim (Custom Colour Options Available)
Cutout	90mm
Dimensions	103mm (Face Dia) x 58mm (H)
Ingress Protection	IP65
Warranty	5 Year Replacement


Electrical Specifications


LED Wattage	9W Max.
Power Supply	Tridonic TRIAC
Options	Tridonic DALI (NFC Programmable)
Operating Temperature (Ta)	-20°C to +40°C
Connection Method	Australian Flex & Plug

Optic Specifications

Light Source	Philips COB
CRI	90+
Delivered Lumens	375Lm - 675Lm
Beam Angle	60°
Correlated Colour Temperature	2700K / 3000K / 3500K / 4000K / 5000K
Rated Lifetime (L80B10)	>50,000hr

Material Specifications

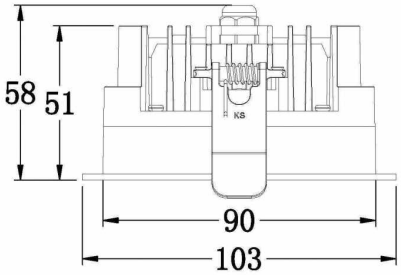



VARIATIONS

DL03-3-27K	5W - 9W Multi-Watt, 2700K
DL03-3-3K	5W - 9W Multi-Watt, 3000K
DL03-3-35K	5W - 9W Multi-Watt, 3500K
DL03-3-4K	5W - 9W Multi-Watt, 4000K
DL03-3-5K	5W - 9W Multi-Watt, 5000K

© NSW Distributors 2026